

### Double braid for Dyneema sheets

Dyneema SK75 braid core, 16-plait high-strength polyester cover. High-strength, low-elongation and lightweight professional braid. White with coloured flecks. Sold in reels.

Fleck			Ø mm	Breaking load kg	m
Blue	Yellow	Red			
06.460.02	06.461.02	06.459.02	2	220	100
06.460.03	06.461.03	06.459.03	3	420	100
06.460.04	06.461.04	06.459.04	4	550	100
06.460.06	06.461.06	06.459.06	6	1300	100
06.460.08	06.461.08	06.459.08	8	2100	100
06.460.10	06.461.10	06.459.10	10	3000	100
06.460.12	06.461.12	06.459.12	12	4000	100
-	06.461.14	06.459.14	14	5000	100



### Floating levilene braid

High strength, reduced elongation, easy to handle. Sold in reels.

White	Orange	White-orange	Pink (fluo color)	Grey	Lime (fluo color)	Black	Ø mm	Breaking load kg	m
06.445.06BI	06.445.06AR	-	-	-	-	06.445.06NE	6	200	200
-	-	06.445.07BA	06.445.07FU	-	06.445.07LI	-	7.5	300	200
06.445.08BI	06.445.08AR	-	-	-	-	06.445.08NE	8	350	200
06.445.10BI	06.445.10AR	-	-	-	-	06.445.10NE	10	600	200
06.445.12BI	06.445.12AR	-	-	06.449.12	-	06.445.12NE	12	800	200
06.445.14BI	-	-	-	06.449.14	-	-	14	900	130
-	-	-	-	-	-	06.445.14NE	14	900	150
06.445.16BI	-	-	-	-	-	06.445.16NE	16	1000	100

## ► Mooring lines and fenders

### High-strength 3-strand polyester line

#### ALTA TENACITÀ / HIGH-STRENGTH

Double-torsion 3-strand line. This line doesn't float. Sold in reels.

White		Colour.		Black		Ø mm	m
White	Breaking load kg	Blue	Grey	Black	Breaking load kg		
06.440.06	530	06.453.06	-	06.450.06	430	6	200
06.440.08	900	06.453.08	-	06.450.08	700	8	200
06.440.10	1300	06.453.10	06.454.10	06.450.10	1100	10	200
06.440.12	2000	06.453.12	06.454.12	06.450.12	1600	12	200
06.440.14	2700	06.453.14	06.454.14	06.450.14	2150	14	100
06.440.16	3600	06.453.16	06.454.16	06.450.16	3000	16	100
06.440.18	4700	06.453.18	-	06.450.18	3850	18	100
06.440.20	5200	06.453.20	-	06.450.20	4200	20	100
06.440.22	5800	06.453.22	-	06.450.22	4700	22	100
06.440.24	6750	06.453.24	-	06.450.24	5500	24	100
06.440.28	7800	06.453.28	-	06.450.28	7000	28	100
06.440.32	8700	06.453.32	-	06.450.32	9100	32	100
06.440.36	11100	-	-	06.450.36	10600	36	100
06.440.40	13500	-	-	06.450.40	14000	40	100




## Marlow®

### MARLOW mooring lines

#### ORMEGGIO DOCKING

High-strength 3-strand polyester.

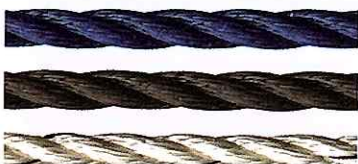

White	Blue	Black	Ø mm	Breaking load kg	m
06.472.06	06.484.06	06.482.06	6	951	200
06.472.08	06.484.08	06.482.08	8	1465	200
06.472.10	06.484.10	06.482.10	10	2570	200
06.472.12	06.484.12	06.482.12	12	3170	200
06.472.14	06.484.14	06.482.14	14	3930	100
06.472.16	06.484.16	06.482.16	16	4766	100
06.472.18	06.484.18	06.482.18	18	6600	100
06.472.20	06.484.20	06.482.20	20	9230	100
06.472.24	06.484.24	06.482.24	24	11210	100
06.472.28	06.484.28	06.482.28	28	14640	100